



INFINITY INFINITY INFINITY



Its style and luxury are readily apparent. Yet its advanced technology and engineering features are tastefully hidden. It's the Infinity, the elevator solution for multilevel homes. With a multitude of premium features, finishes and color options, the Infinity is easily installed into new or existing homes, delivering a quiet, smooth, dependable operation.



Exceptional Standard Features

- Durable design with industry leading 1,000 lb. maximum capacity.
- Unique variable speed valve provides exceptionally smooth ride.
- Submersible pump & motor insures whisper quiet operation.
- Stainless steel control panel.
- Choice of eight melamine wall panels or plywood cab finish.



Smooth, quiet and reliable operation you can depend on.



Requiring minimal space, easily adapts to new and existing homes.

Graduated speed control allows for unsurpassed soft starts and stops.

Style and luxury with many choices of cab finishes, colors and options.

INFINITY

Additional Standard Features


- Illuminated haloed push button in cab.
- Solid ceiling with four recessed incandescent down-lights.
- Attractive digital floor indicator in cab.
- Black anodized aluminum cab trim.
- Solid oak handrail.
- Emergency alarm and stop buttons with emergency battery back-up cab lighting and lowering.

Outstanding Cab Options

- Raised solid oak cab walls and ceiling.
- Power or manual cab gates.
- Variety of cab type configurations and sizes including straight through, 90° exit, and side entry.
- Hardwood cab flooring.
- Brass control panel and brass colored light fixtures.



- Brass colored and clear anodized aluminum cab trim.
- Telephone cabinet in brass or stainless steel finish.
- Power or manual landing doors.

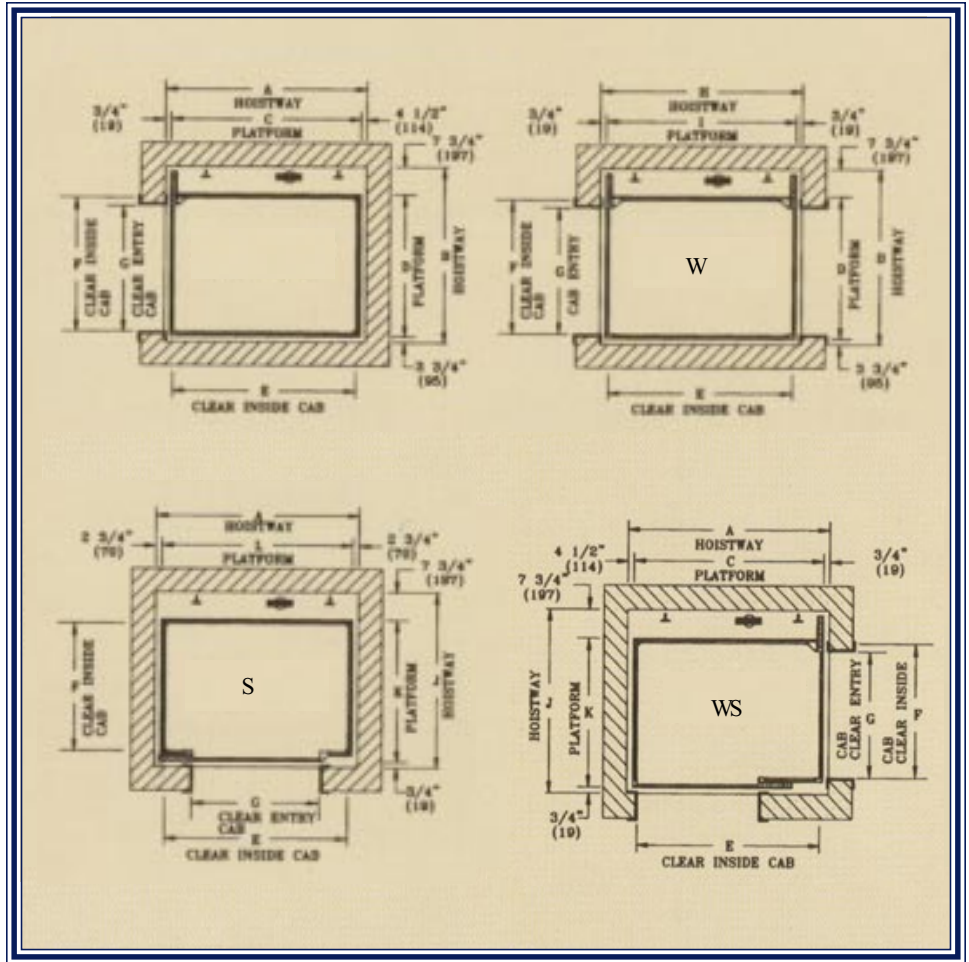

Technical Aspects

Power:	208 Volt, single phase, 30 amp 220 Volt, three phase, 30 amp
Drive:	1:2 Cable Hydraulic
Speed:	36 ft/min. (0.18 m/s) nominal
Rated Load:	750 lbs. (341 Kg)
Platform Dimensions:	35\"W (914 mm) x 48\"L (1220 mm) or 35\"W (914 mm) x 54\"L (1372 mm) or 35\"W (914 mm) x 60\"L (1525 mm)
Emergency Backup:	Automatic Emergency Battery Powered Lowering with Automatic Battery Recharging
Control Type:	Constant Pressure or Automatic
Pump Type:	Submersible Type, variable speed valve
Electronics:	Solid State
Maximum Travel:	40 feet (12 m)
Number of Stops:	4 maximum
Pit Depth Required:	12\" (152 mm)
Overhead Clearance:	92\" (2337 mm)

A variety of cab finishes and colors allow you to customize the cab design to satisfy your personal needs.



**WRIGHT
&
FILIPPIS**

First to Serve, First to Care...Since 1944

1-800-482-0222 or 248-829-8214

www.FirstToServe.com

With over 20 locations throughout Michigan, please call for the location nearest you.